

## DTC MODULAR JACK UTP CAT 5E




### DESCRIPTION

- The new style Jack provides Category 5E system performance and user-friendly installation features it features dual color-coded wiring label with both T568 A/B wiring pattern. Rear termination field for easy termination of a jack while installed in a wall plate, surface mount boxes, and blank patch panels for a wide variety of Applications

### APPLICATION

- Available in Cat 5E, T568A/B wiring schemes, meet or exceed TIA/EIA Cat 5E requirements
- ISO/IEC 11801 ed. 2.2: June 2011; EN 50173-1: May 2011 ( DIN EN 50173-1 ) as well as ANSI /TIA / EIA 568 C
- Housing : high temperature thermoplastic
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50 $\mu$ "gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance. Support Gigabyte Ethernet ( 10 / 100 / 1000 Gbps )
- Available in different colors ( Blue, Black, Red or Yellow )

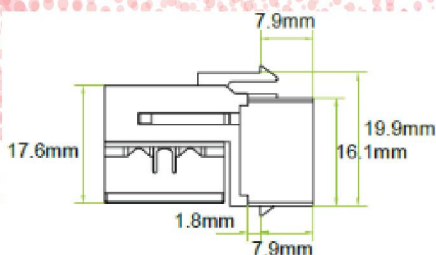

Description	Parameter
Contact Resistance Max.	100m $\Omega$
Insulation Resistance Min.	500M $\Omega$
Return Loss dB	5.8dB
Next dB	4.7dB
PSNEXT dB	5.5dB